

# X1500 X1500B Socket Dual Model Rack Mounting Kit

---

version 1.1  
January 2023



## Table of Contents

- Overview of Dual Rack Mounting Kit ..... 3
- Mounting the X1500 Socket - Ports Front ..... 4
- Mounting the X1500 Socket - Ports Back ..... 8
- Mounting the X1500B Socket - Ports Front ..... 12
- Mounting the X1500B Socket - Ports Back ..... 14

## Overview of Dual Rack Mounting Kit


This guide contains instructions for the Rack Mounting Kit for these Socket models: X1500 and X1500B. For more information about identifying the X1500 Socket model, see [Overview of Reimaging Cato Sockets](#).

You can choose to install the Socket in the rack in these configurations:


- X1500 Socket model:
  - Socket ports facing the front of the rack ([Mounting the X1500 Socket - Ports Front \[4\]](#))
  - Socket ports facing the back of the rack ([Mounting the X1500 Socket - Ports Back \[8\]](#))
- X1500B Socket model:
  - Socket ports facing the front of the rack ([Mounting the X1500B Socket - Ports Front \[12\]](#))
  - Socket ports facing the back of the rack ([Mounting the X1500B Socket - Ports Back \[14\]](#))

# Mounting the X1500 Socket - Ports Front


1. Fix Left / Right Ear by Flat M3x4L screws(left / right 2pcs )

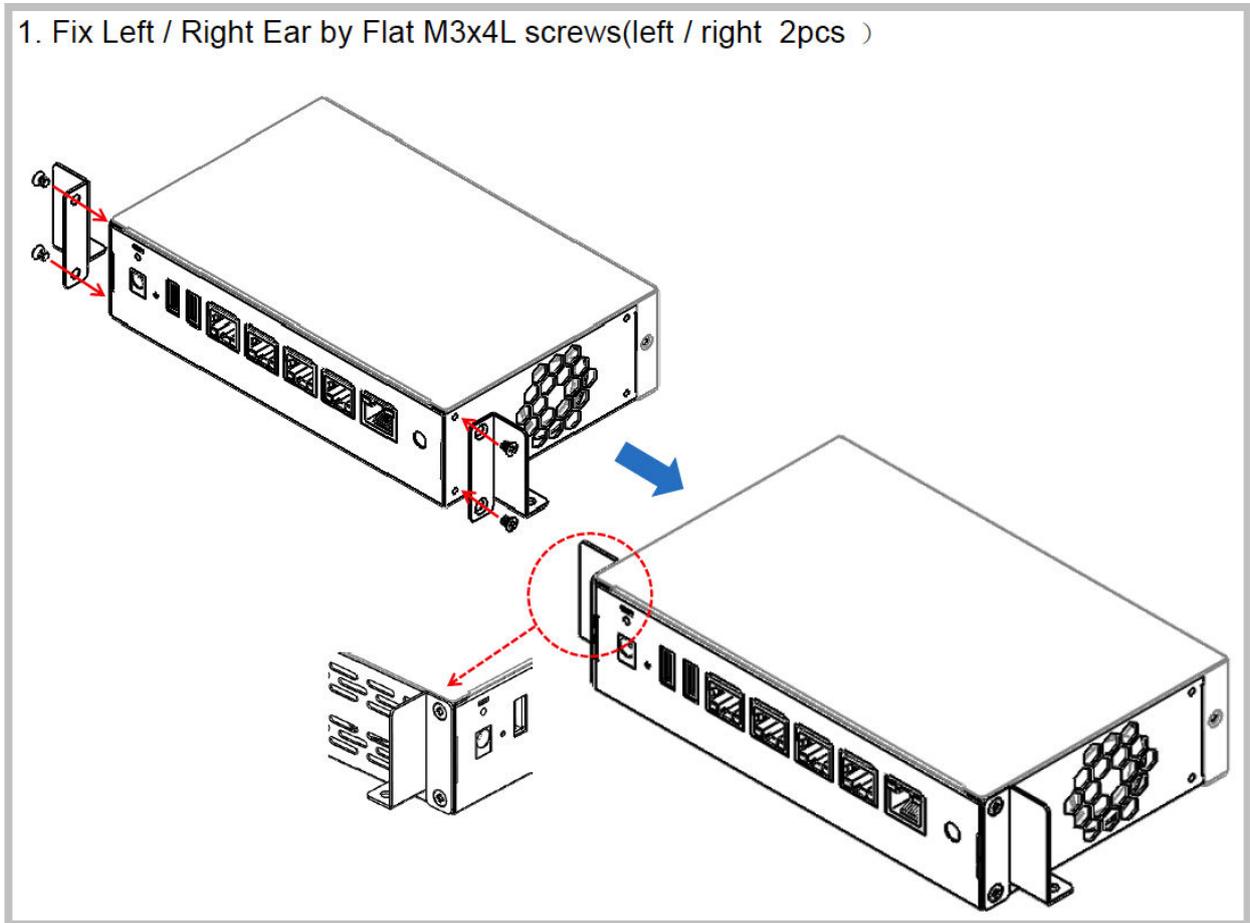


2. Fix device in tray by Pan head washer M3x6L screws ( left /right 1pcs )

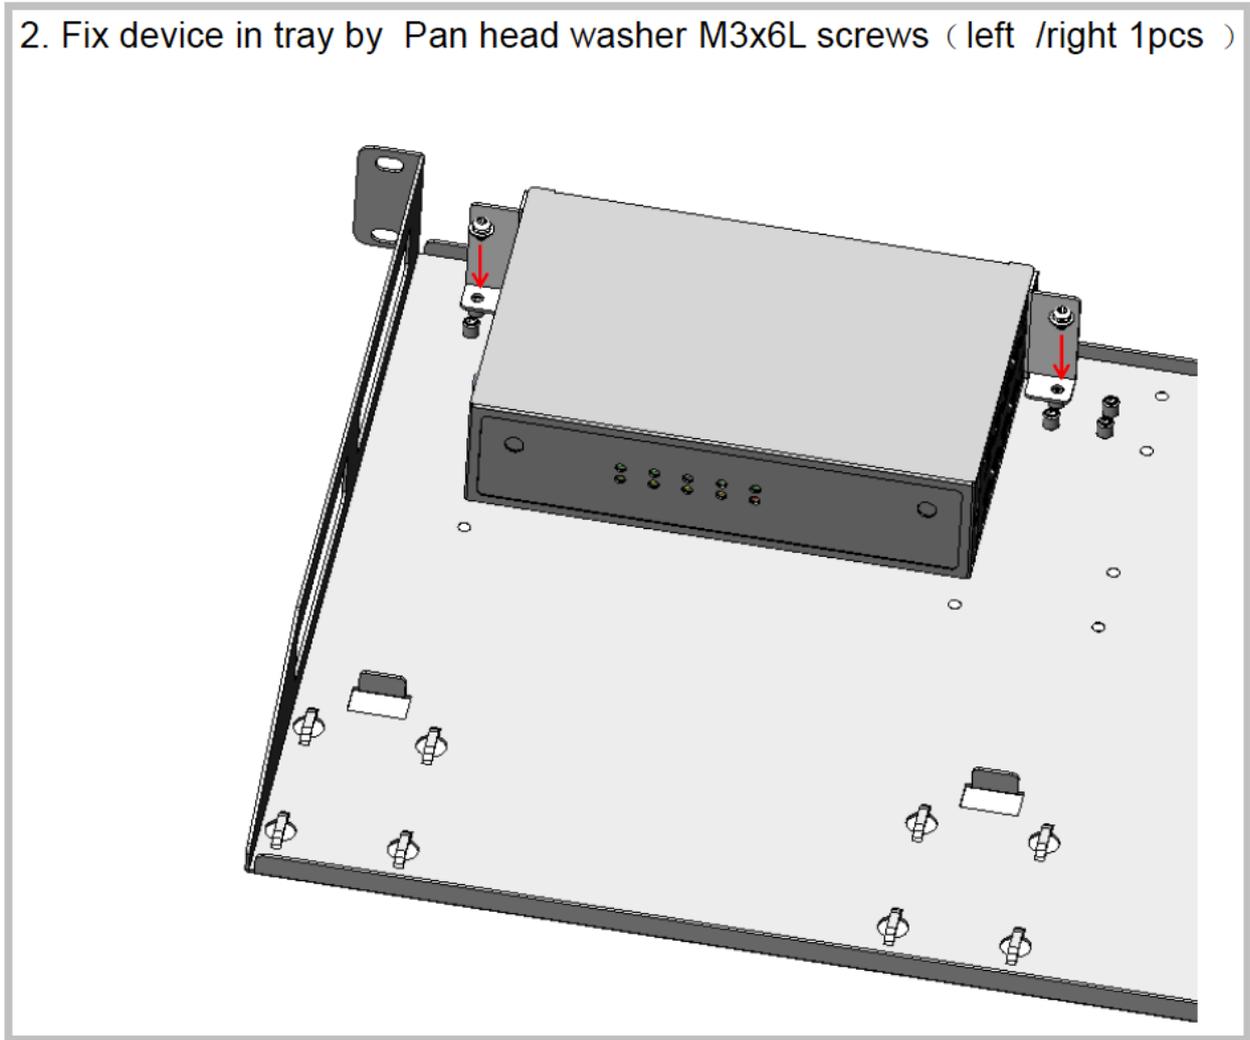

3. Fix power adaptor in tray by cable tie

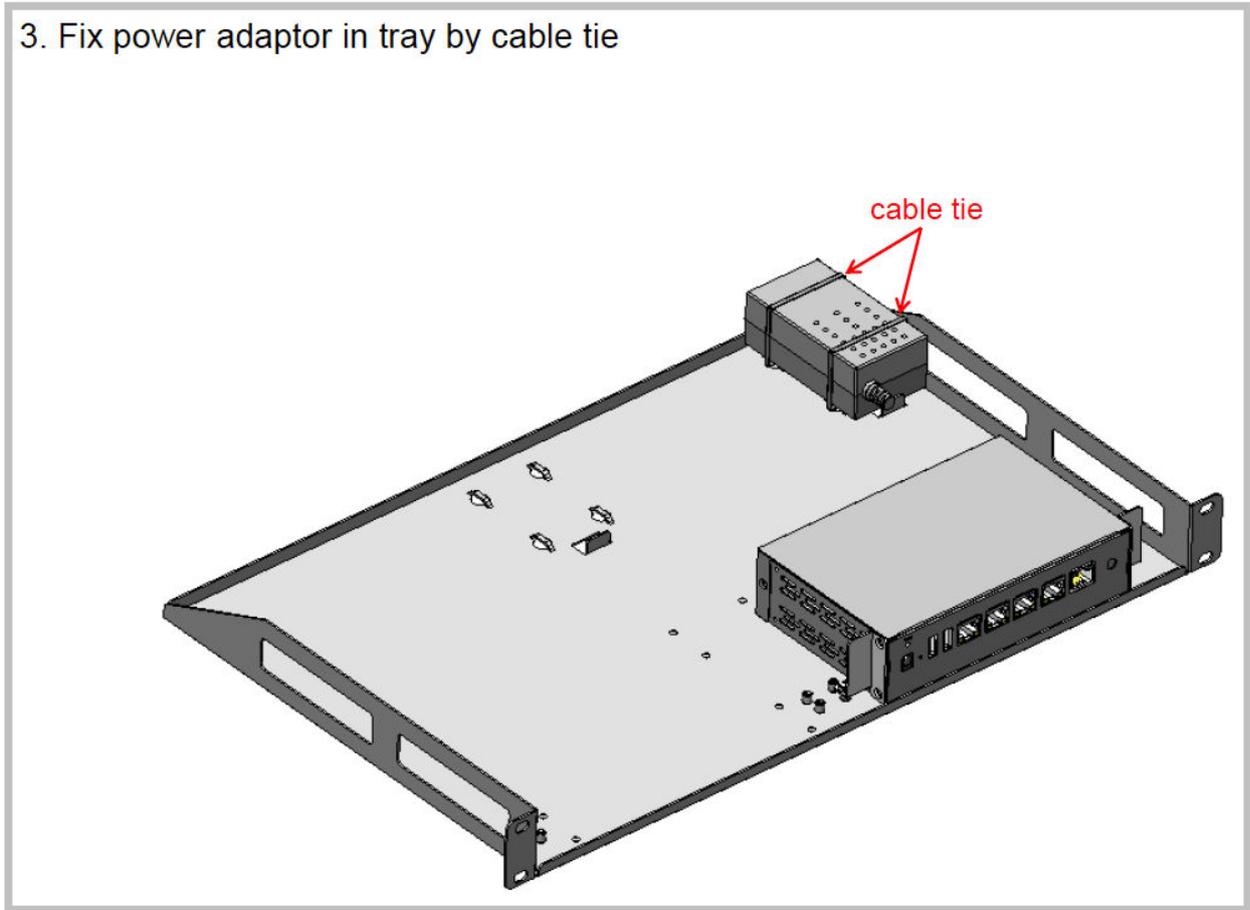


4. Finished

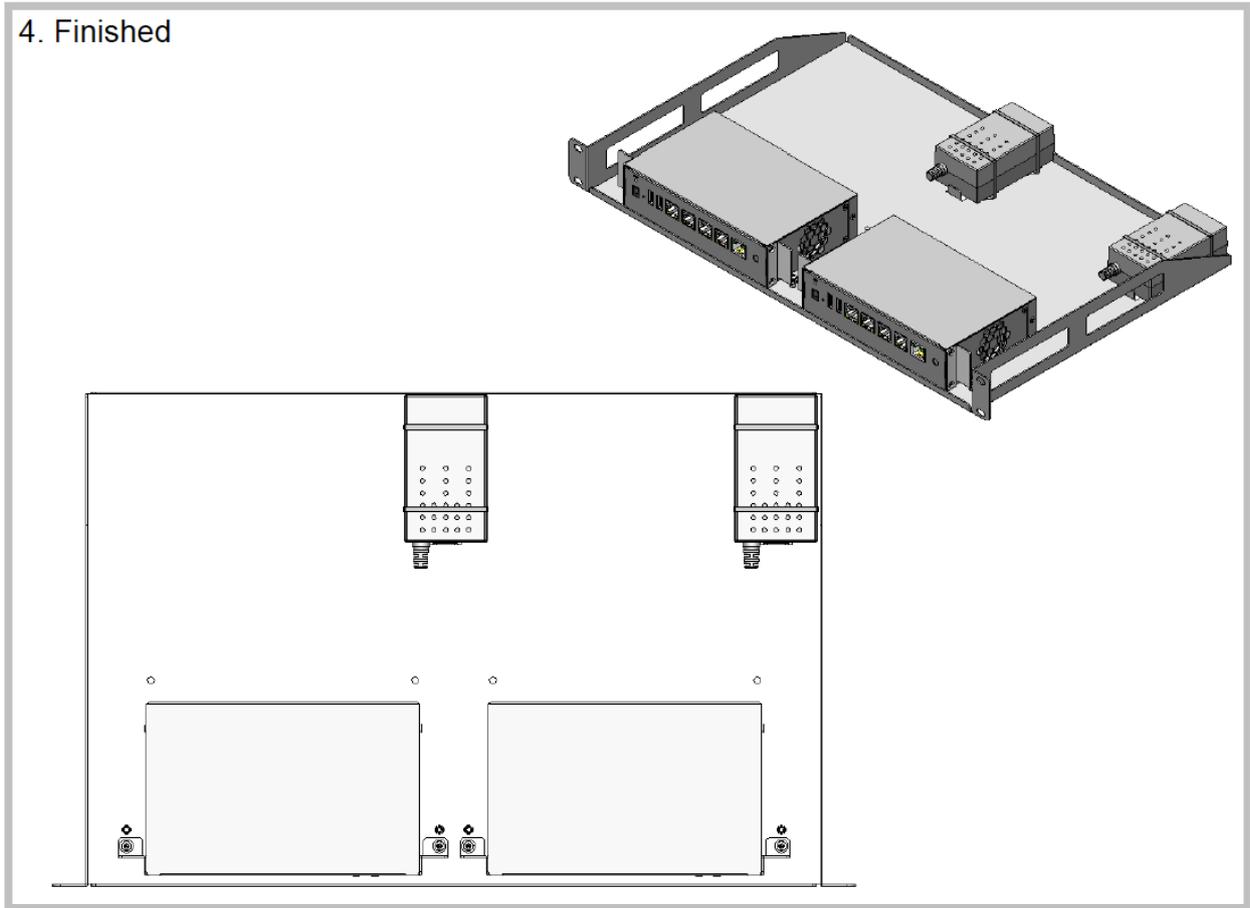


# Mounting the X1500 Socket - Ports Back


1. Fix left / right ears by Flat M3x4L screws(Left / Right 2pcs )

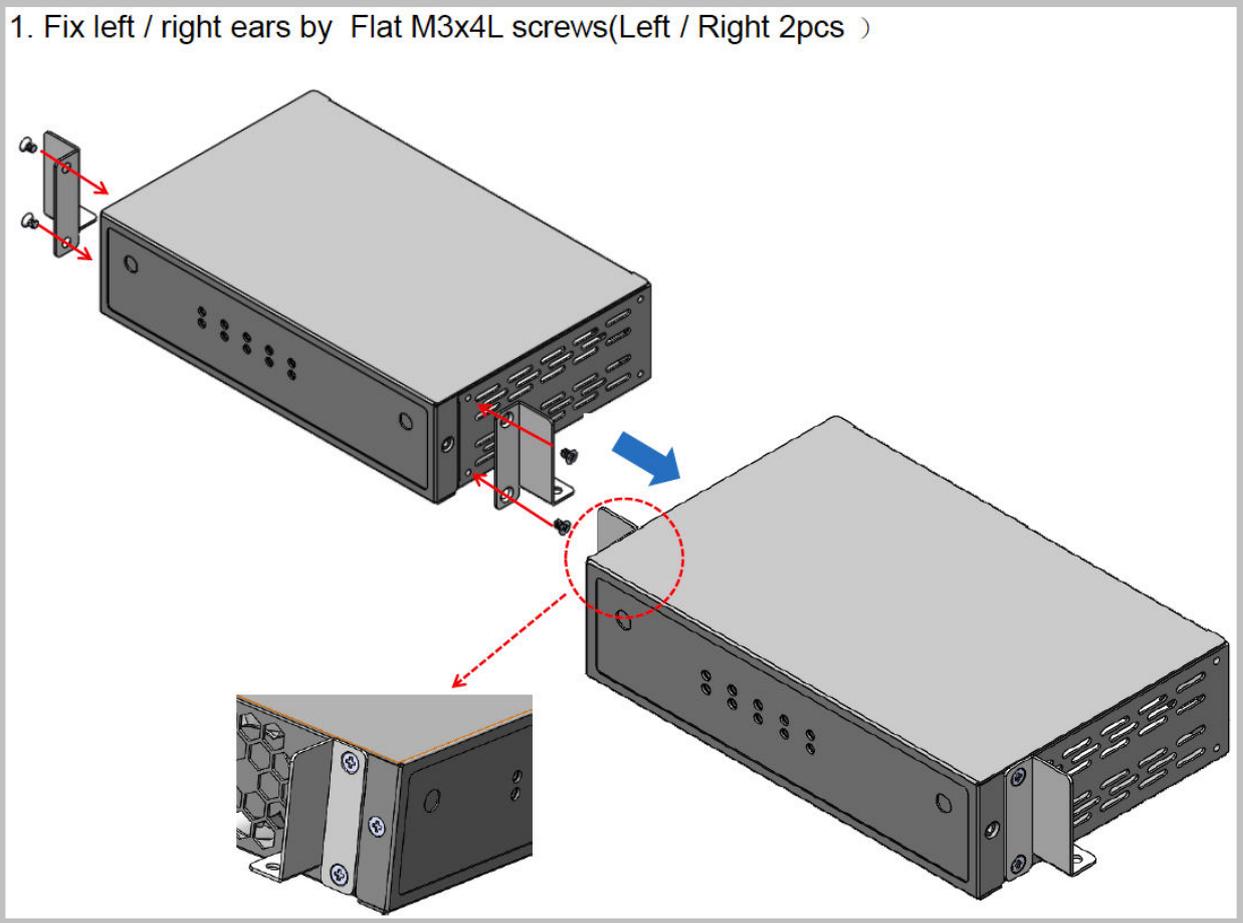


2. Fix device on the tray by Pan head washer M3x6L screws ( left /right 1pcs )

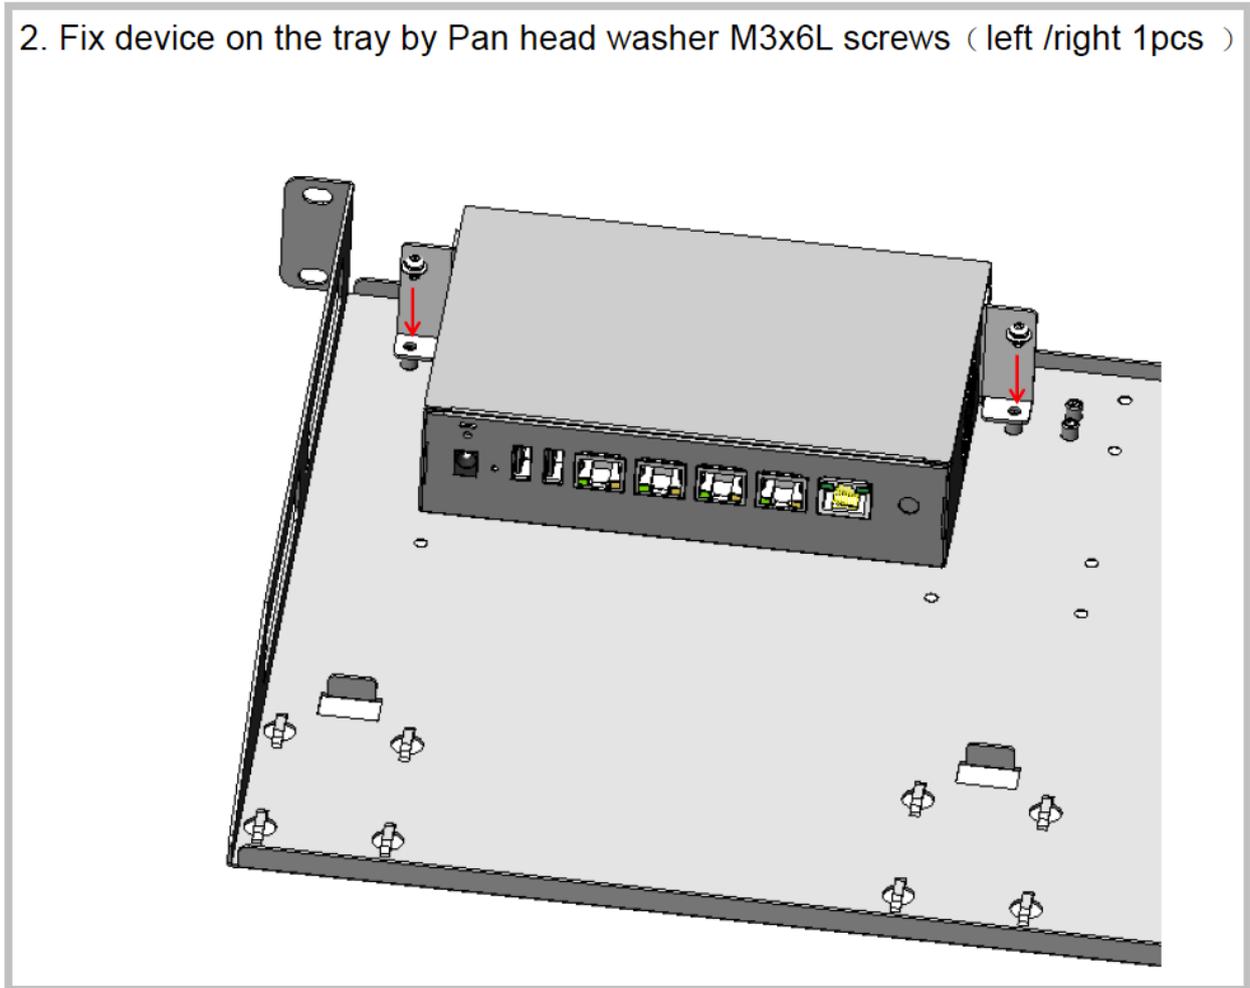

3. Fix Power adaptor in tray by cable tie

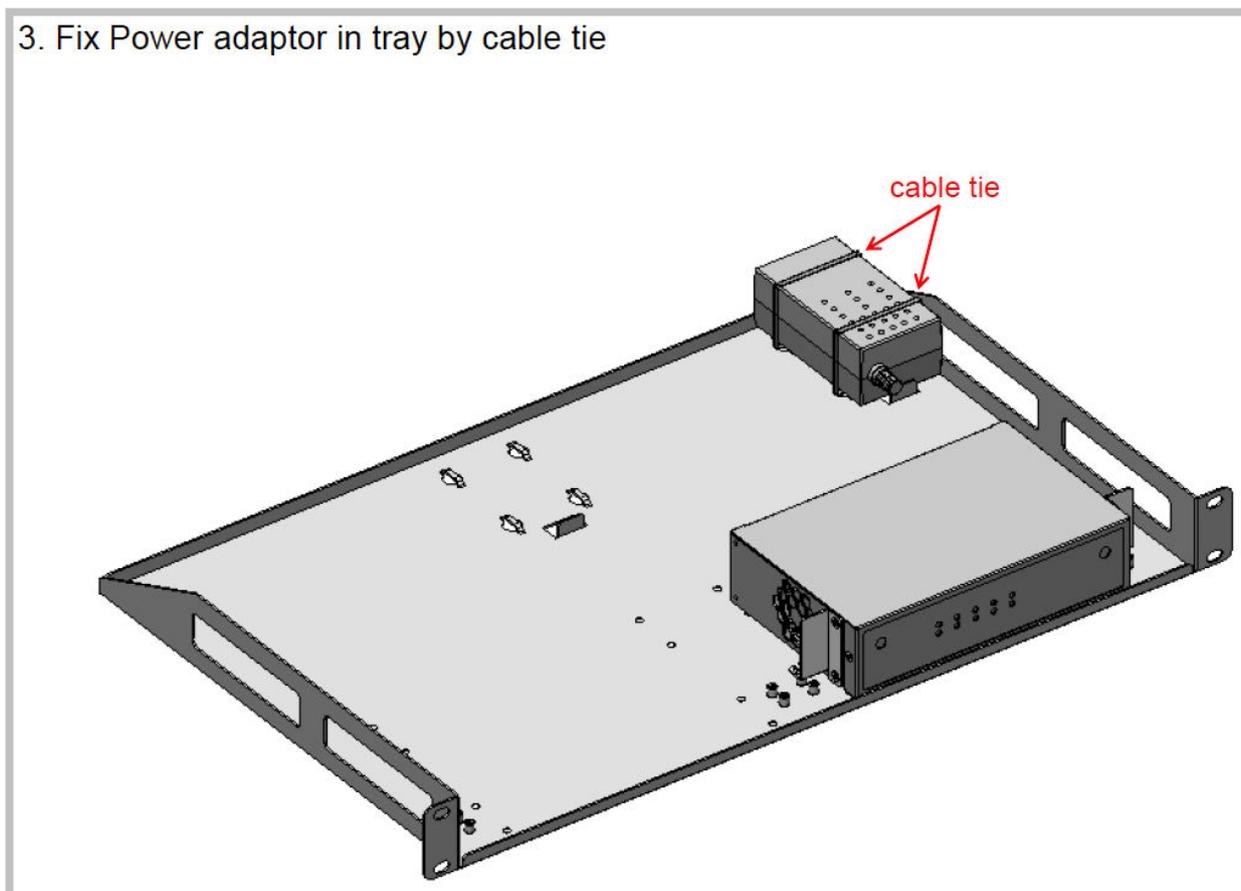


4. Finished

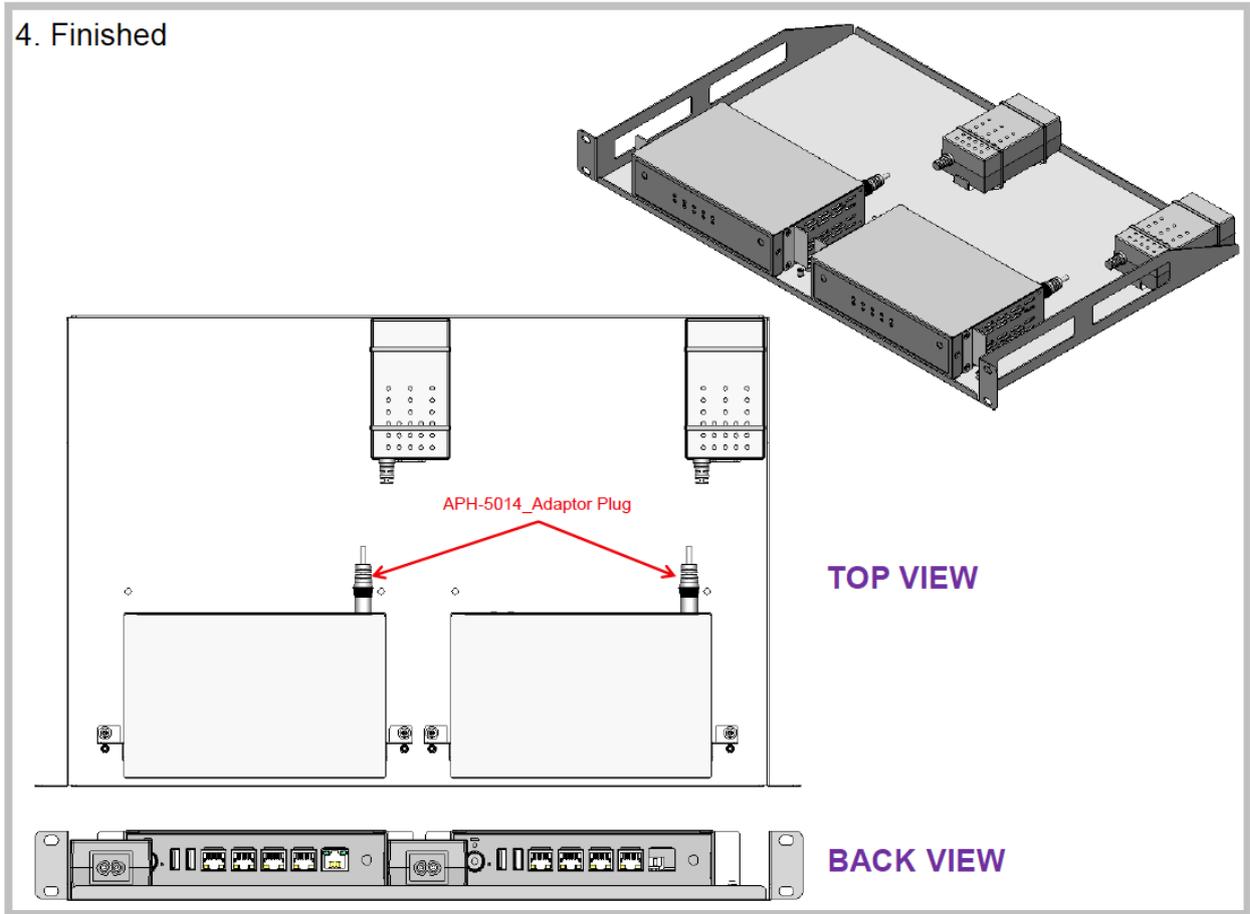


# Mounting the X1500B Socket - Ports Front



1. Fix device in tray by Flat M3x4L screws (4x)

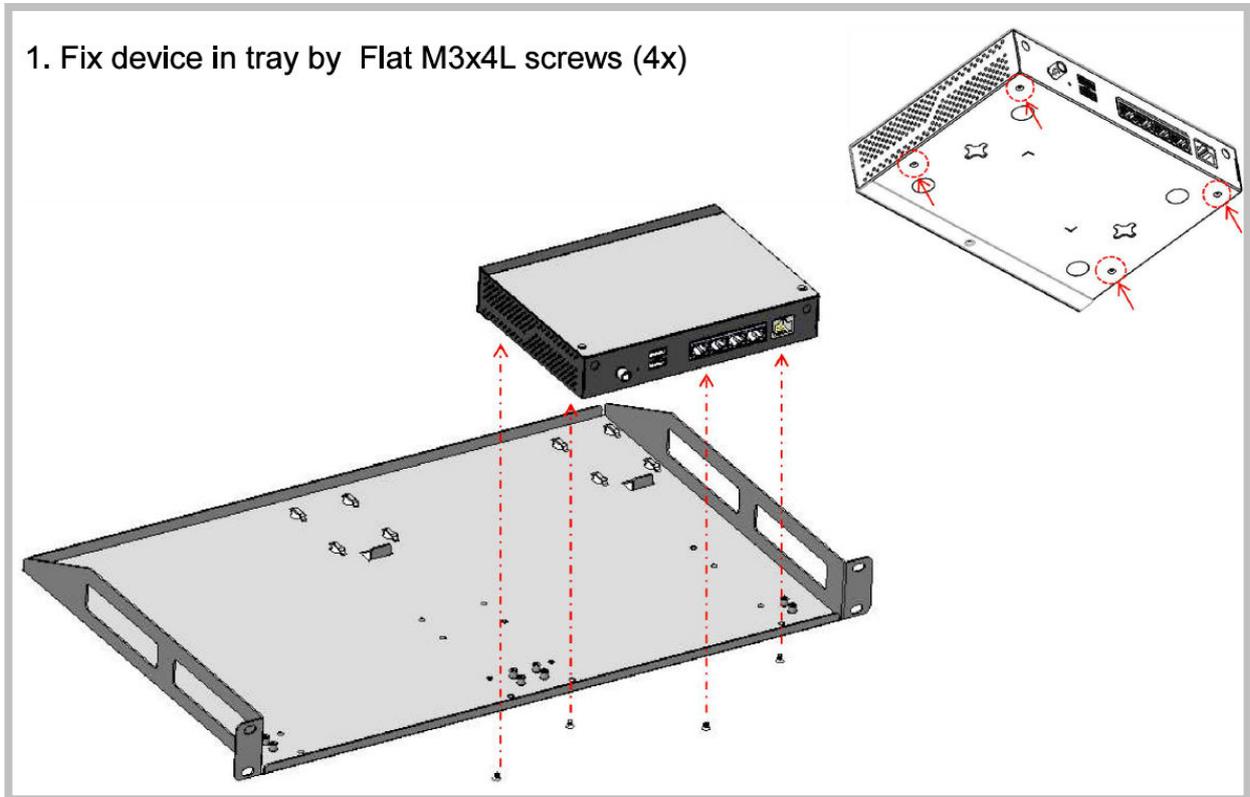

2. Fix power adaptor by cable tie

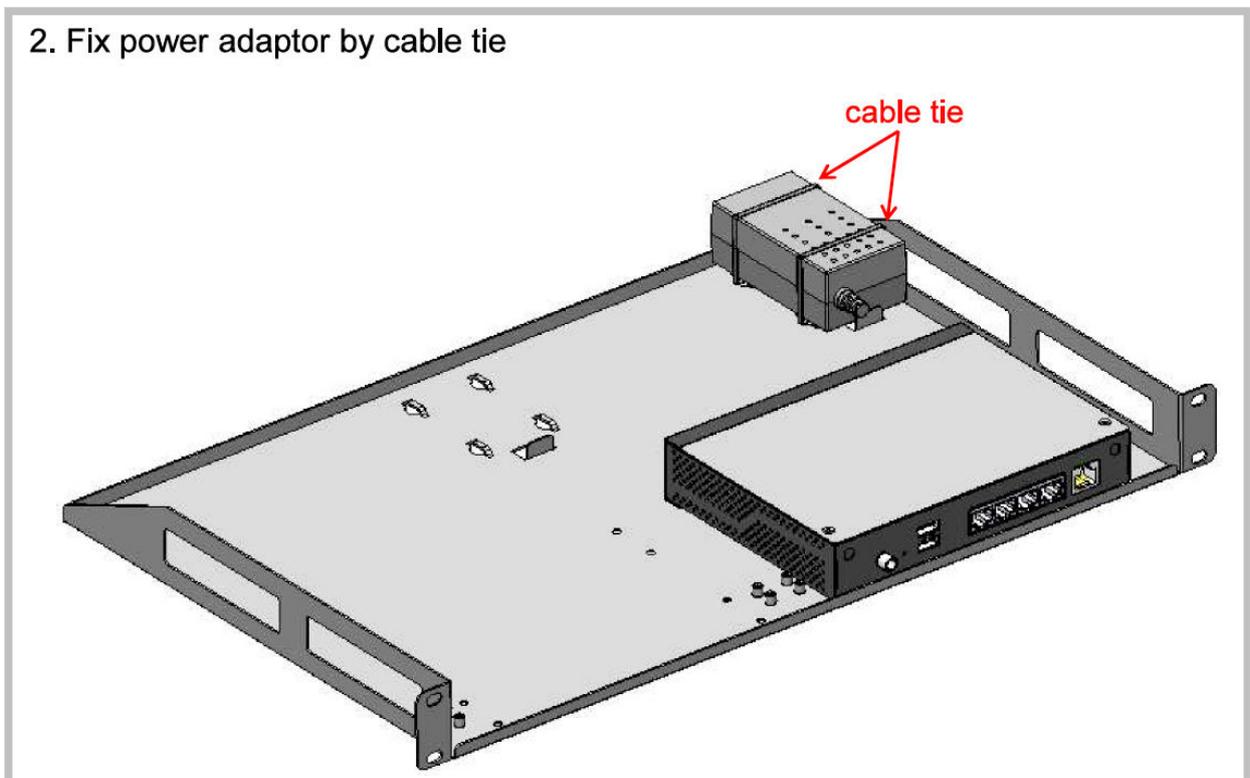

3. Finished

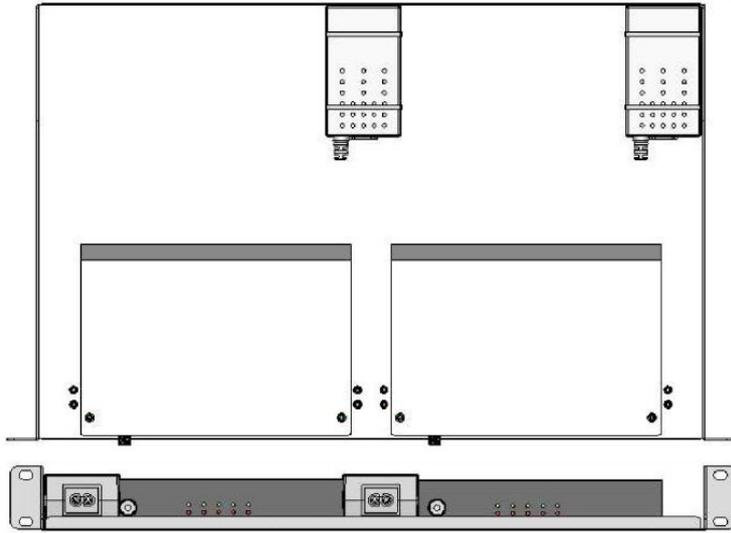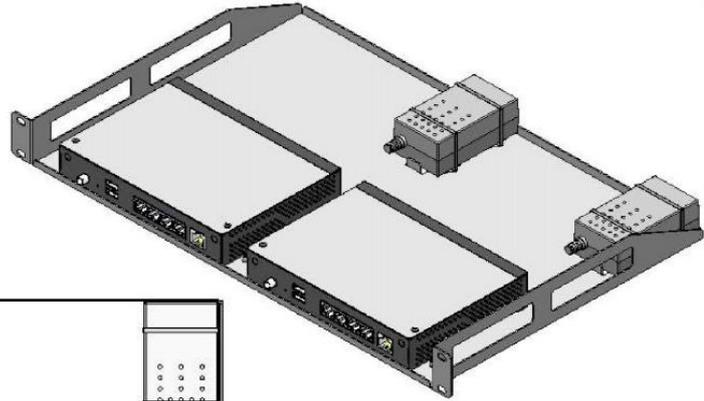


TOP VIEW


BACK VIEW

# Mounting the X1500B Socket - Ports Back

1. Fix device in the tray by Flat M3x4L screws (4x)

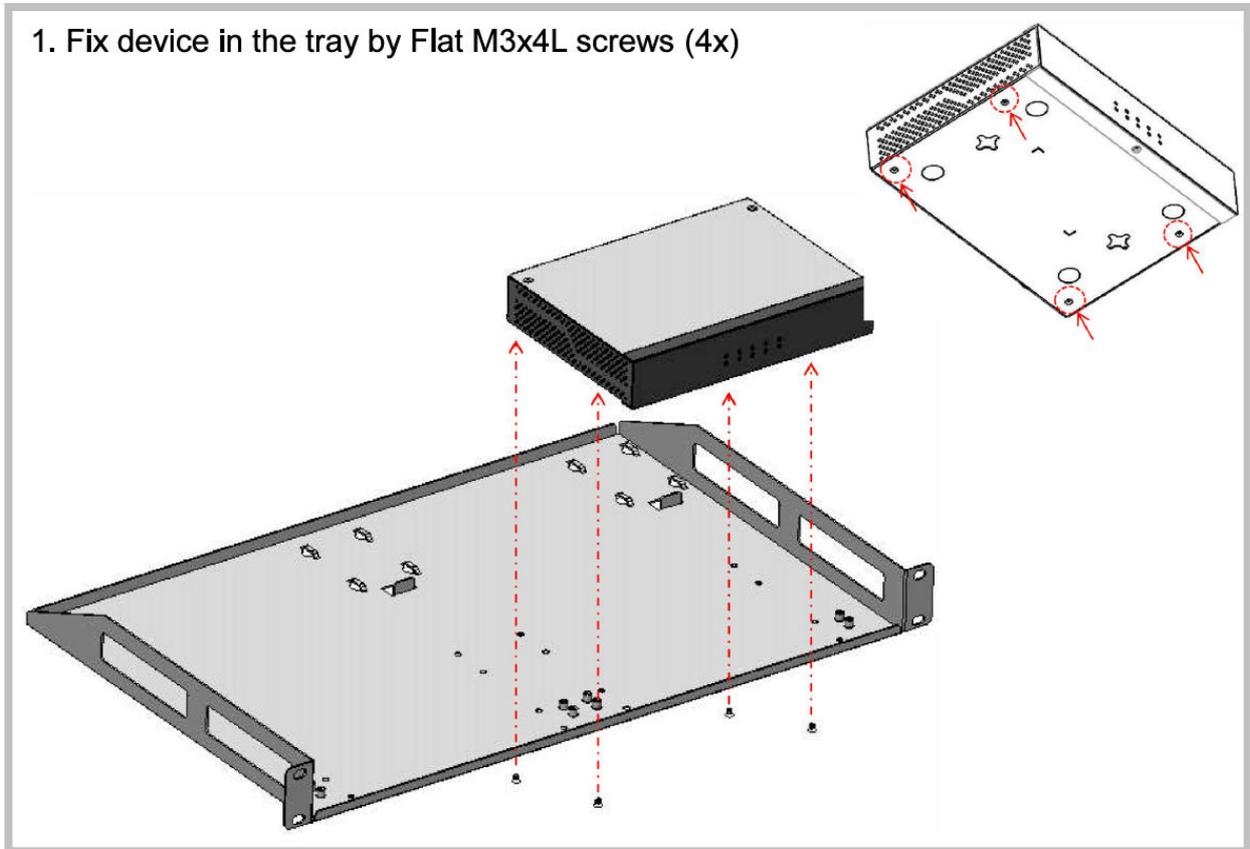

2. Fix power adaptor by cable tie

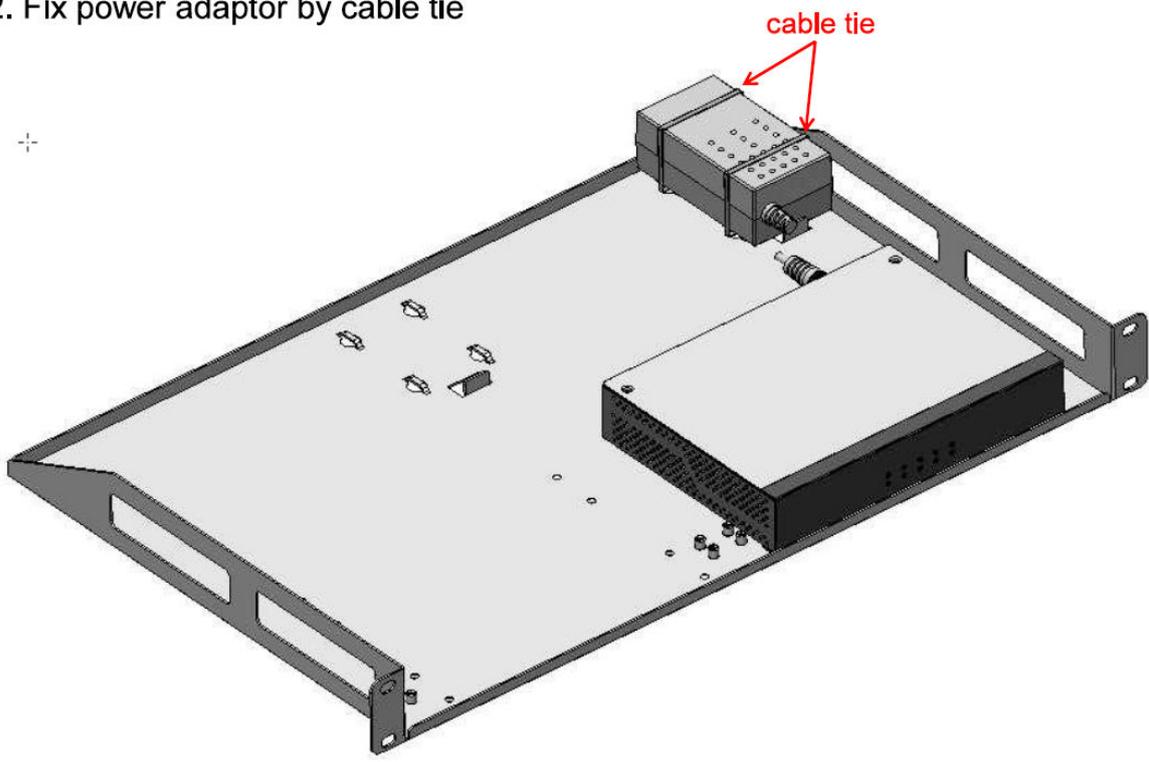

3. Finished

