


# X1700 Socket

The Cato X1700 Socket is a high performance SD-WAN device that enables enterprise WAN, Internet, and cloud connectivity.

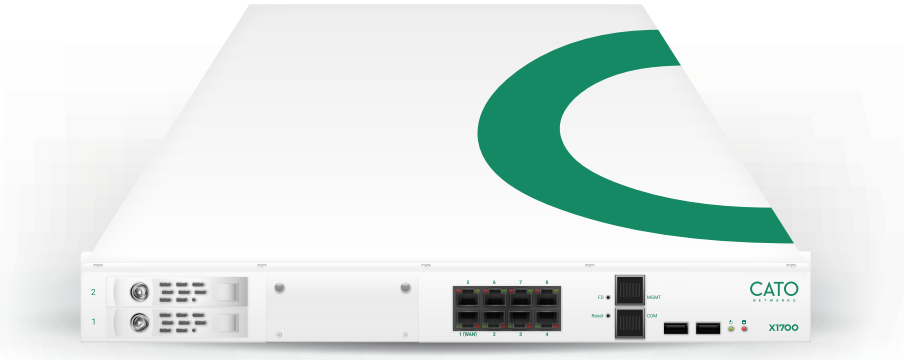

Specification	X1700	X1700B
Max Tunnel Throughput	3Gbps	10Gbps
CPU	Intel Core i3 4330 3.5Ghz CPU / dual core	Intel Xeon E-2176G 3.7Ghz CPU / 6 cores
System Memory	8GB DDR3	16GB DDR4
Ethernet Port	<ul style="list-style-type: none"> <li>8 x PCIe GbE RJ45 + management port</li> <li>Optional add-on cards:               <ul style="list-style-type: none"> <li>4 x 1GbE</li> <li>2 x 1Gb Fiber</li> <li>2 x 10Gb Fiber</li> <li>4 x 10Gb Fiber</li> </ul> </li> </ul>	
Expansion	2 x PCIe x 8 slots	
Storage Device	2 x 320GB SATA HDD	2 x 128GB SATA SSD
Serial Port	One front access RJ45 for system console	
LEDS	Power State, Storage Status, Ethernet Status, Ethernet Speed	
Power	2 x 300W redundant power supply units	
Dimension	D:448mm x W:435mm x H:44mm	D:553mm x W:438mm x H:44mm
Operating Environment	<ul style="list-style-type: none"> <li>Temperature: 0 to 40°C (32 to 104°F)</li> <li>Humidity 20% to 90%RH @ 55°C</li> </ul>	
Storage Environment	<ul style="list-style-type: none"> <li>Temperature: -10 to 70°C (14 to 158°F)</li> <li>Humidity 5% to 95%RH @ 55°C</li> </ul>	
Certification	CE/FCC/UL	
Weight	14KG	